



## 1. Productname

Nenko Interactive - Aroma panel

## 2. Product code

29107085

## 3. Colour

Please see the image



## 4. Short description

The interactive aroma panel offers a versatile and customizable aromatherapy experience. It comes with four scent cartridges, which you can fill with different essential oils. The aroma panel then diffuses delightful aromas into the area to enrich the environment with a loving scent. With scents like soothing lavender to invigorating eucalyptus, the possibilities are endless. The oil pads in the cartridges are easy to change, allowing you to cater to the needs and preferences of the users

## 5. Sensory stimulations

Feel, hear and see

## 6. Maintenance

If cleaning the product becomes necessary, use only a soft damp cloth. Do NOT use harsh chemicals or abrasives.


## 7. Electrical specification

Input: 100-240V 50/60Hz,  
1.5A Output: 12V 5A

## 8. Troubleshooting

The Aroma panel is designed to be low maintenance. If problems occur:

- Make sure the unit is powered off and unplugged from the mains and check that the power cables have not come loose:

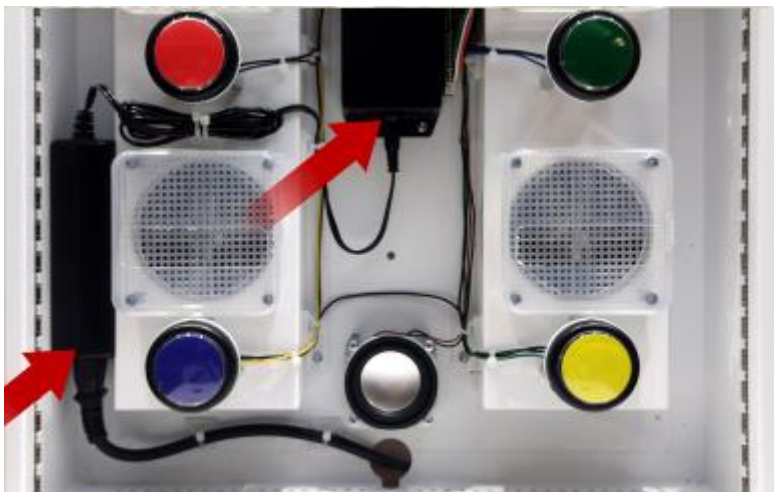

- Use the power button to turn the unit off. Unplug from mains power and leave for 1 minute to perform a reset. After this time plug back into mains power and turn the unit back on.

## 9. Dimensions

Height = 40 cm

Width = 40 cm

Depth = 11 cm


Weight = 5,5 kg

## 10. Operation

The function buttons on the remote can be used to activate the fans. When activated by the remote the fans will stay on for 5 seconds.


The robust buttons on the panel can still be used as normal.

When in full colour mode, the quadrant LED colours will still activate to show which one is active. Note that if the dominant LED colour quadrant is activated, that will now light up white so that it can still be identified. For example, if the dominant LED colour is green, when the green button is pressed, that quadrant will light up in white. The other quadrants will still light up in its respective colour (4).

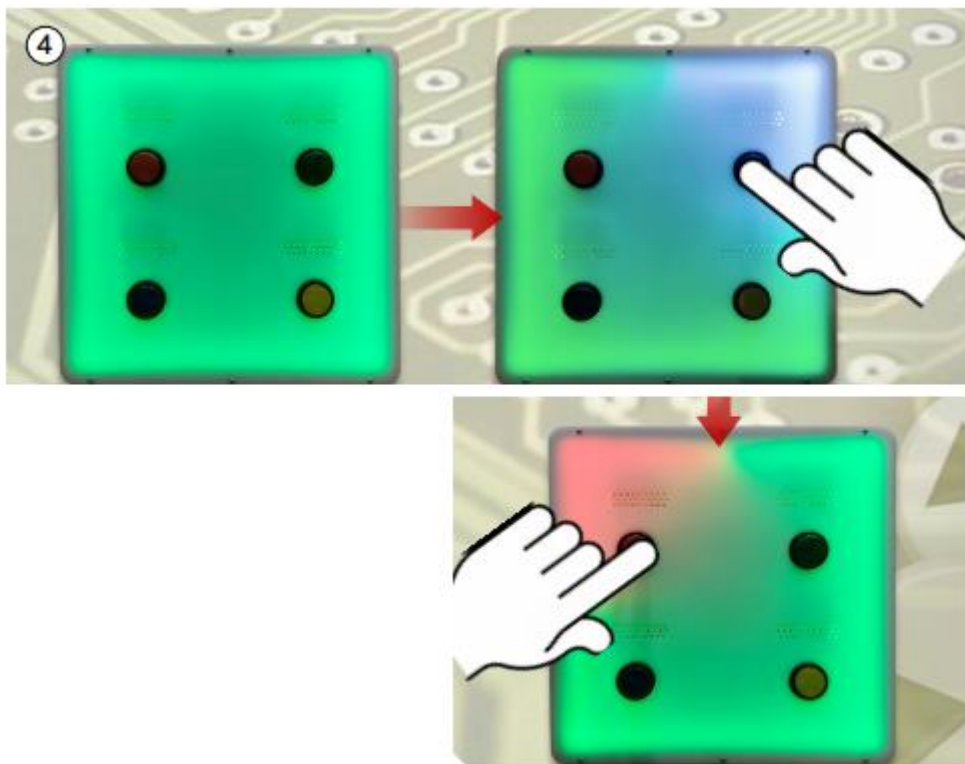




There are 4 robust buttons on the front of the panel. Each in control of a coloured quadrant. When one of these buttons is pressed it will play a sound effect, its LED colour will shine brighter and the internal fan will blow the scent smell out of the relative vent. The fan will blow for as long as the button is held down for (2).

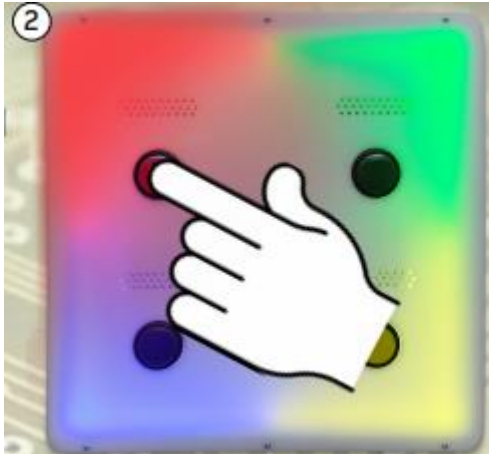


The Aroma panel can be paired with compatible remotes, so that the features can be activated remotely.

A paired remote can be used to change the entire LED colour of the panel (3)

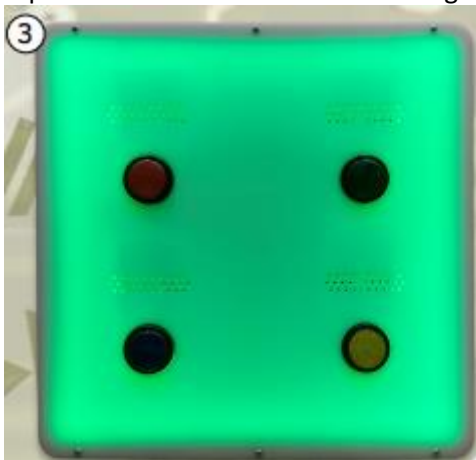




On the top of the Aroma panel you will find these 3 buttons

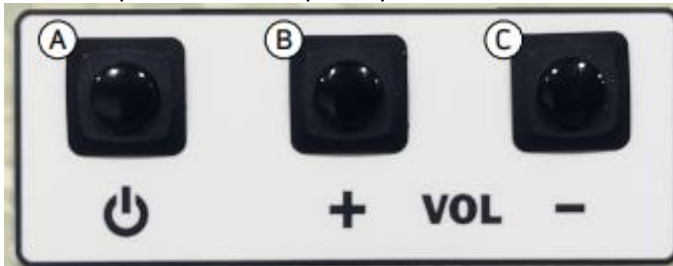

- A. **Power On/Off**  
Hold this button down for 1 second to power the unit on. This process is repeated to turn the unit off.
- B. **Volume Up**  
Individual presses of this button will increase the volume.
- C. **Volume Down**  
Individual presses of this button will decrease the volume.

When the unit is powered on, you will be greeted with a startup sound effect and the red, green, blue and yellow quadrants will illuminate (1).

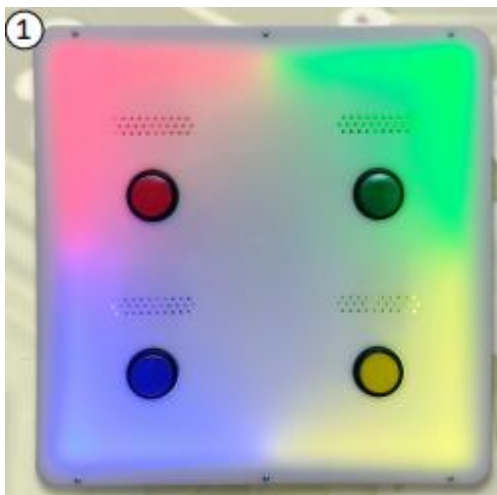

## 10. Installation

To begin, you will need to prepare 4 hanging fixings on the desired surface. Refer to hanger slot dimensions on page 4 for the correct layout.


Once the fixings are installed, the Aroma unit can be put into position. Do not lift the unit by the front Perspex face.

Access to the inside of the unit can be gained by loosening the 2 fixings found at the top of the unit, with the supplied allen key (1).






Once the screws have been loosened, the front Perspex face can be carefully hinged downwards (2). Do not let the door drop, as this can damage the Perspex front.

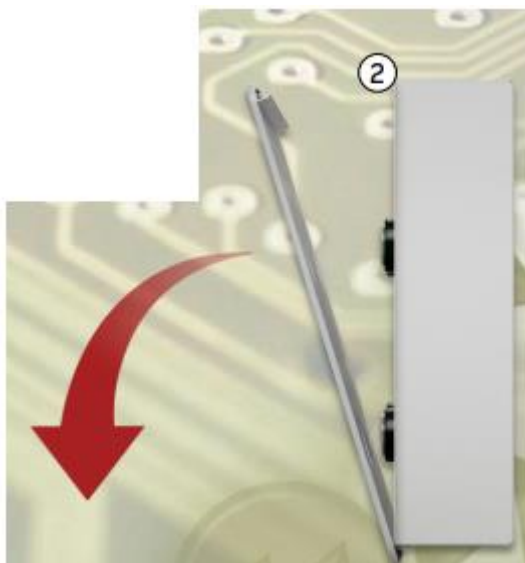


A securing fixing can be used to anchor the unit in place (3). This will prevent the Aroma panel from being lifted away from the mounted surface. Once mounted, the unit can be plugged into mains power.

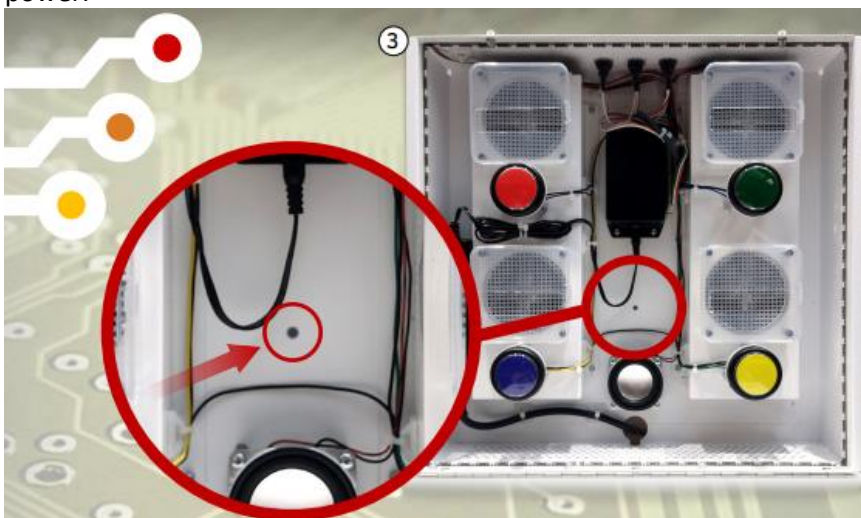



The 4 clear boxes can be opened to allow the user to insert their desired scents (not supplied) (4).

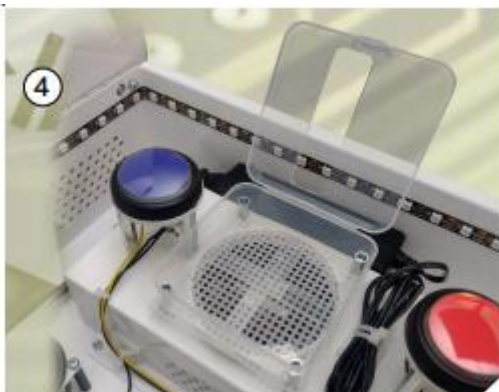

For more information, visit our website [www.nenko.com](http://www.nenko.com)

